

## Product Specifications

### Architectural Specification:

Alutherm (AP) 50/100mm thick Polyester.  
Use in conjunction with straining wires placed at 275mm centres as per the manufacturers installation guidelines.

Details	Alutherm 50mm	Alutherm 100mm
Tested in accordance with and conforms to SANS 1381 part 1: 2007		
Material Classification	TYPE 3 Mats or Bats with reflective membrane laminated to material	
Length (Std)	10m Roll	10m Roll
Longer lengths with increments of 500mm available		
Width (Std)	1100mm	1100mm
Roll Diameter	600mm	760mm
Density	12Kg/m <sup>3</sup>	12Kg/m <sup>3</sup>
Finished Roll weight	11kg	17kg
<b>NRC – Noise Reduction Coefficient</b>		
	0.60	0.70
<b>Thermal Property Values</b>		
Resistance 'R' (m <sup>2</sup> K)/W	1.25	2.65
Conductivity 'K' W/m.K	0.040	0.040

### Applications

#### Domestic:-

- Superior under roof tile and over ceiling insulation in residential buildings.
- Retrofit to existing building over ceilings.
- Cut out around down lights if transformers exist.

#### Commercial:-

- Above ceiling only – not suitable for over purlin.

### Fire Properties

Tested to SANS 428 and awarded a B/B1/2/H (USP) (No Sprinklers).

### Quality Management System

Africa Thermal Insulations (Pty) Ltd products are manufactured according to ISO 9001:2008 Quality Management System.

### BBBEE

Level 6

### Warning

A leaking Roof could cause condensation and corrosion to occur which may damage the product and will negatively affect its thermal properties.


### Transportation and Care

To ensure that ALUTHERM<sup>®</sup> remains in pristine condition, the rolls must be transported in a suitable, fully enclosed truck. They should also be stored under cover to protect them from direct sunlight and rain. Rolls should be stacked on their sides or on the end of the roll without the overlap. Observe the "This way up" arrow printed on the packaging. Africa Thermal Insulations (Pty) Ltd cannot accept any claim for replacement for material if the above instructions are not adhered to.

### Alutherm Polyester



### Residential application under Tiles

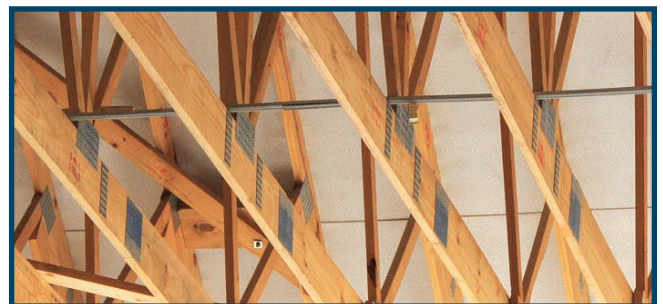

### Advanced Benefits and Features of Alutherm

Non Toxic.

Non Carcinogenic.

Does not attract rodents.

Easy to install – No safety equipment needed during installation.

Reduces Dust penetration.

Faced on both sides to prevent moisture migration into bulk especially in high humidity regions

Tel: 011 462 9122  
Email: [ati@ati-insulations.co.za](mailto:ati@ati-insulations.co.za)  
[www.alububble.co.za](http://www.alububble.co.za)